



# HARDWARE

for Bathrooms



## SHOWER DOOR HINGES 4

Bilbao	4
Barcelona	11
BLACK Fittings	15
Mini Hinges, Clamps an Connectors	19
MasterTrack® ST	22
SlideTec Rio	25

---

## REINFORCEMENT BARS 27

Square	28
Round	29


---

## SHOWER DOOR HANDLES AND KNOBS 31

## SHOWER DOOR SEALING STRIPS 37

## ACCESSORIES FOR BATHROOMS 41

Mirror Fixings	42
Mirror Tapes	44
Duplocoll®	45
Glazing Profiles	47
Shelf Supports	48
Cleaning/Surface Protection	50

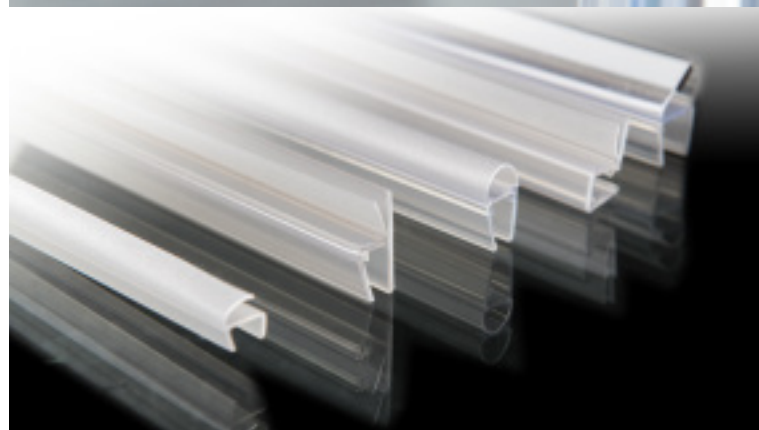

# Bohle Bilbao Shower Door Hinges

The Bilbao shower door hinge series combines modern, square design with useful technical details. Thanks to its versatility and functionality as well as its outstanding price/performance ratio, the Bilbao range is popular with builders, planners and architects. Bilbao is equipped with a self-closing function starting from an opening angle of approx.  $\pm 15^\circ$ . Outside this range, the hinge can stop in any position.








## Shower Door Hinge Bilbao glass/wall 90° one side wall mounted



FINISH	ART. NO.
Polished	SA 5211549
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel

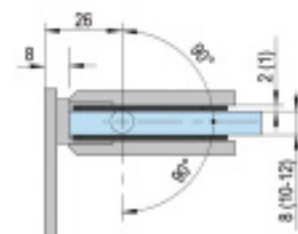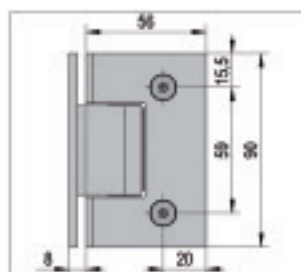



① Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware

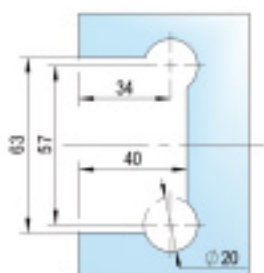


## Shower Door Hinge Bilbao glass/wall 90° both sides wall mounted



FINISH	ART. NO.
Polished	SA 5218010
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel




① Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware





# Shower Door Hinge Bilbao glass/glass 180°



**1** Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware · For mounting doors to a fixed sidelight




FINISH	ART. NO.
Polished	SA 5218210
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel

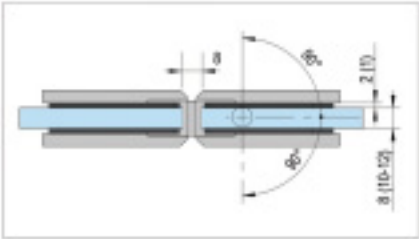



# Shower Door Hinge Bilbao glass/glass 90°



**1** Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware · For mounting doors to a fixed sidelight




FINISH	ART. NO.
Polished	SA 5218330
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel





# Shower Door Hinge Bilbao glass/glass 135°



1 Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware · For mounting doors to a fixed sidelight




FINISH	ART. NO.
Polished	SA 5218410
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	1000 mm
Material	Stainless Steel





# Shower Door Hinge Bilbao 360° floor mounted



1 Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware




FINISH	ART. NO.
Polished	SA 5222500
Max. door weight per pair	45 kg
Mounting	Glass/floor 360°
Material	Stainless Steel





# Clamp Bilbao glass/wall 90°



**i** Glass thickness 8, 10, 12 mm · Supplied with mounting hardware · For vertical partitions




FINISH	ART. NO.
Polished	SA 5213606
Mounting	Glass/wall 90 °
Material	Stainless Steel





# Corner Clamp Bilbao glass/wall 90°



**i** Glass thickness 8, 10, 12 mm · Supplied with mounting hardware · For fixed partitions




FINISH	ART. NO.
Polished	SA 5213140
Mounting	Glass/wall 90 °
Material	Stainless steel










## Corner Clamp Bilbao glass/glass 90°

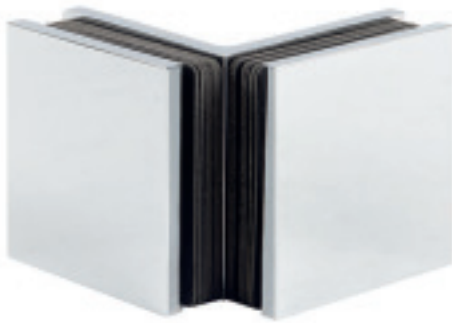

① Glass thickness 8, 10, 12 mm · Supplied with mounting hardware · For fixed partitions · x = glass thickness




FINISH	ART. NO.
Polished	SA 5213150
Mounting	Glass/glass 90 °
Material	Stainless Steel





## Side Connector Bilbao glass/glass 180°



① Glass thickness 8, 10, 12 mm · Supplied with mounting hardware · For fixed partitions

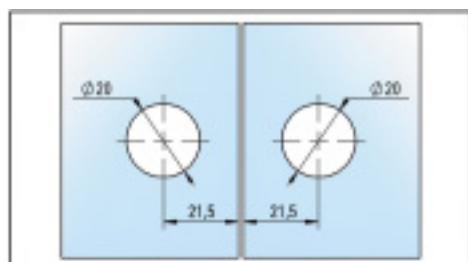


FINISH	ART. NO.
Polished	SA 5213160
Mounting	Glass/glass 180 °
Material	Stainless Steel

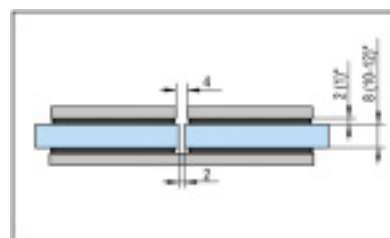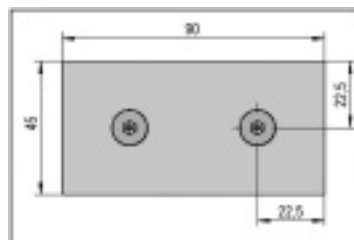



# Corner Clamp Bilbao glass/glass 135°



FINISH	ART. NO.
Polished	SA 5213170
Mounting	Glass/glass 135 °
Material	Stainless Steel

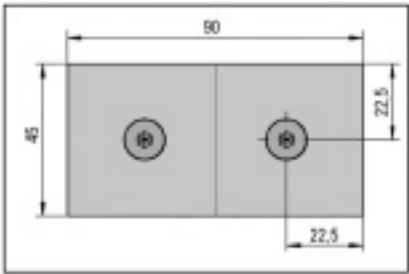

❶ Glass thickness 8, 10, 12 mm · Supplied with mounting hardware · For fixed partitions



# Bohle Barcelona Shower Door Hinges



Barcelona makes the perfect shower door hinge for the comfortable family bathroom. The harmonious design with rounded-off edges is versatile in use. Barcelona is also extremely sturdy and highly functional. Barcelona is equipped with a self-closing function starting from an opening angle of approx.  $\pm 15^\circ$ . Outside this range, the hinge can stop in any position.




Shower Door Hinge Barcelona glass/wall 90° one side wall mounted



FINISH	ART. NO.
Polished	SA 5218110
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel





① Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware




Shower Door Hinge Barcelona glass/wall 90° both sides wall mounted



FINISH	ART. NO.
Polished	SA 5219010
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel




① Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware





## Shower Door Hinge Barcelona glass/glass 180°



❗ For mounting doors to a fixed sidelight · Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware




FINISH	ART. NO.
Polished	SA 5219210
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel

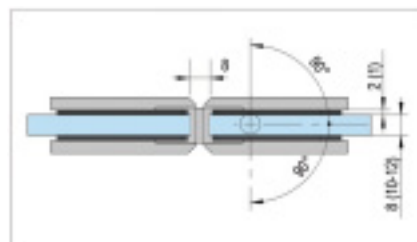



## Clamp Barcelona glass/wall 90°



❗ Glass thickness 8, 10, 12 mm · Drill hole in glass ø18 mm



FINISH	ART. NO.
Polished	SA 5200093
Mounting	Glass/wall 90 °
Material	Stainless Steel








# Corner Clamp Barcelona glass/wall 90°



FINISH	ART. NO.
Polished	SA 5200095
Mounting	Glass/wall 90 °
Material	Stainless steel





1 Glass thickness 8, 10, 12 mm · Supplied with mounting hardware · For vertical partitions






# Corner Clamp Barcelona glass/glass 90°



FINISH	ART. NO.
Polished	SA 5200097
Mounting	Glass/glass 90 °
Material	Stainless Steel



1 Glass thickness 8, 10, 12 mm · Drill hole in glass ø18 mm



# Bohle BLACK Shower Door Hinges


Bohle offers a unique range of quality Stainless-Steel Bathroom fittings in BLACK powder coated finish. Bilbao Hinges in 90° Glass to Wall half plate and 180° Glass to Glass, with a selection of clamps and connectors allow for multiple shower applications or configurations. To compliment this, Bohle introduces Square Reinforcement Bar and fittings as well as All black Seals to complete the range. These are in the relevant product catagories seen further on in this catalogue.





# Shower Door Hinge Bilbao glass/wall 90° one side wall mounted



1 Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware




FINISH	ART. NO.
Black	SA 5211549B
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel





# Shower Door Hinge Bilbao glass/glass 180°



1 Glass thickness 8, 10, 12 mm · Self-closing from 15° · Supplied with mounting hardware · For mounting doors to a fixed sidelight





FINISH	ART. NO.
Black	SA 5218210B
Max. door weight per pair	40 kg
Max. door height	2000 mm
Max. door width	900 mm
Material	Stainless Steel

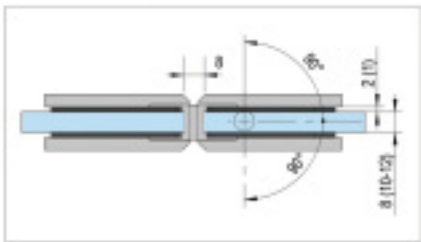


## Clamp glass/wall 0°



FINISH	ART. NO.
Black	SA 5213612B
Mounting	Glass/wall 90 °
Material	Stainless Steel





① Glass thickness 6, 8, 10 mm · Supplied with mounting hardware · For vertical partitions




## Corner Clamp glass/wall 90°



FINISH	ART. NO.
Black	SA 5213116B
Mounting	Glass/wall 90 °
Material	Stainless steel





① Glass thickness 6, 8, 10 mm · Supplied with mounting hardware






## Corner Clamp glass/glass 90°



FINISH	ART. NO.
Black	SA 5213622B
Mounting	Glass/glass 90 °
Material	Stainless Steel





① Glass thickness 6, 8, 10 mm · Supplied with mounting hardware · For vertical partitions




## Side Connector glass/glass 180°



FINISH	ART. NO.
Black	SA 5213627B
Mounting	Glass/glass 180 °
Material	Stainless Steel



① Glass thickness 6, 8, 10 mm · Supplied with mounting hardware · For fixed partitions

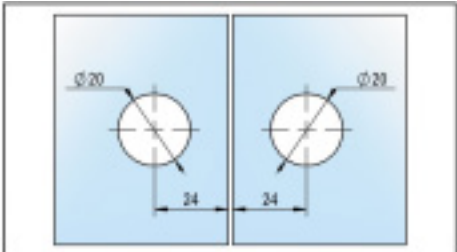




# Bohle Mini Hinges, Clamps and Connectors

## Shower Door Hinge Mini glass/wall 90° one side wall mounted



❶ Glass thickness 6, 8 mm · Self-closing from 15° · Supplied with mounting hardware

FINISH	ART. NO.
Polished	SA 8041031
Max. door weight per pair	25 kg
Max. door width	750 mm
Material	Stainless Steel




## Shower Door Hinge Mini glass/glass 180°



❶ Glass thickness 6, 8 mm · Self-closing from 15° · Supplied with mounting hardware


FINISH	ART. NO.
Polished	SA 8041032
Max. door weight per pair	25 kg
Max. door width	750 mm
Material	Stainless Steel





# Clamp glass/wall 0°



**i** Glass thickness 6, 8, 10 · Supplied with mounting hardware · For vertical partitions




FINISH	ART. NO.
Polished	SA 5213612
Mounting	Glass/wall 90 °
Material	Stainless Steel





# Corner Clamp glass/wall 90°



**i** Glass thickness 6, 8, 10 mm · Supplied with mounting hardware






FINISH	ART. NO.
Polished	SA 5213116
Mounting	Glass/wall 90 °
Material	Stainless steel





# Corner Clamp glass/glass 90°



① Glass thickness 6, 8, 10 mm · Supplied with mounting hardware · For vertical partitions




FINISH	ART. NO.
Polished	SA 5213622
Mounting	Glass/glass 90 °
Material	Stainless Steel





# Side Connector glass/glass 180°



① Glass thickness 6, 8, 10 mm · Supplied with mounting hardware · For fixed partitions

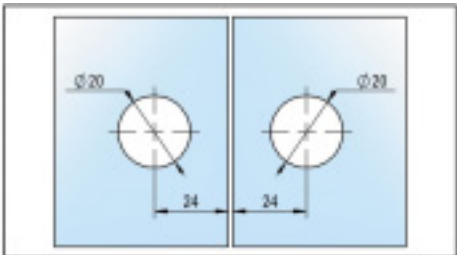

FINISH	ART. NO.
Polished	SA 5213627
Mounting	Glass/glass 180 °
Material	Stainless Steel



# Bohle MasterTrack® ST Shower Door System

MasterTrack® ST for showers is a high-tech sliding door system which stands out due to its minimalistic design, sophisticated technology and ease of installation. Thanks to a clamping mechanism, drill holes in the glass pane are no longer required, which makes the installation process even simpler. Special clamping inserts guarantee a safe and stable support of the glass. The technologically advanced carriages and patented all-metal dampers with high-quality hydraulics enable a unique running smoothness of the system.



## Bohle MasterTrack® ST Recess application single door




① Glass thickness 8 mm · no glass processing required · Height adjustable  $\pm 3$  mm · Minimum door width for one-sided damping: 400 mm · Minimum door width for double-sided damping: 600 mm · Please order optional threshold separately: BO 5700052 / BO 5700053 · for fixing the running track to a fixed sidelight (one-sided corner application/U-shower) please order the glass mounting kit separately: BO 5700045 / BO 5700046 · Please order optional damping mechanism separately: · Important: Connecting profiles for fixed glazing and sealing strips for doors not included in delivery

### INCLUDED IN DELIVERY:

- 1 x Running Track
- 1 x Cover
- 1 x Snapframe standard for fixed sidelight profile
- 2 x Carriages
- 2 x Stopper
- 2 x Wall Bracket
- 1 x Bottom Guide
- 1 x Clamp-on seal for fixed sidelight

FINISH · LENGTH	ART. NO.
Polished anodised E8/C0 · 1200 mm	BO 5741543
Polished anodised E8/C0 · 2000 mm	BO 5742043
Max. door weight	40 kg
Material	Aluminium

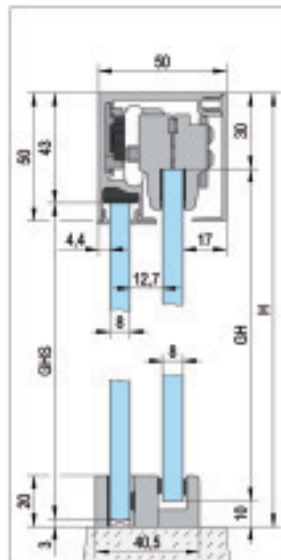

## Bohle MasterTrack® ST Glass mounting kit




① For fixing the running tracks to a fixed glazing (one-sided corner application/U-shower)

### INCLUDED IN DELIVERY:

- 1x Glass Fixing Adaptor left
- 1x Glass Fixing Adaptor right
- 2x End caps for optional threshold

FINISH	ART. NO.
Polished anodised E8/C0	BO 5700046
Max. door weight	40 kg
Material	Aluminium





# Bohle MasterTrack® ST Damping Mechanism



	ART. NO.
	BO 5700051
Max. door weight	40 kg
Material	Aluminium

**i** Optional damper for all MasterTrack® ST sliding door installations ·  
Minimum door width for one-sided damping: 400 mm · Minimum door width  
for double-sided damping: 600 mm

# SlideTec Rio Sliding Shower Door System

The SlideTec Rio sliding door system for all-glass showers stands out due to its unobtrusive elegance and supreme quality stainless steel. Whether in the private or commercial sector, the SlideTec Rio sliding door system lives up to demands for the highest quality. Bohle offers the following systems as a standard: double door corner application, single door corner application with sidelight, single door recess application.



## SlideTec Rio Accessory Set, Single Door



**i** Glass thickness 6, 8, 10mm · Header Support Track, Connector for return panel, or Corner Connector are ordered separately. SlideTec Rio can be used in Corner installation as well as to Return Panel(s) with Connectors SA5214893 or SA5213894

**contact Bohle for technical information**

FITTING	ART. NO.
Polished	SA 5214111
Header Support Track	SA 5420261
Connector for return panel	SA 5214893
Corner Connector	SA 5214894
Max. door weight	60 kg
Max. door height	2200 mm
Max. door width	775 mm
Material	Stainless steel
Finish	Polished
Length	3000 mm

### INCLUDED IN SA5214111:

- 2x Sliding track holder
- 2x Fixed sidelight point fixing
- 2x Door rollers
- 2x Anti lift point fixing
- 2x Stoppers
- 1x Bottom guide
- 1x flush pull handle - closed



# Reinforcement Bars

## Square

Bohle has achieved the perfect mix of form and function with Square reinforcement bar, available in bright polished and BLACK powder coated stainless steel.



## Round

Easy to mount because reinforcement bars can be trimmed to any desired length. No cut-outs or drilled holes in the glass required.




## Reinforcement Bar square Bohle Basic square



FINISH · LENGTH	ART. NO.
Polished · 2000 mm	SA 5420264
Black · 2000 mm	SA 5420264B
Size	15 x 15 mm
Material	Stainless Steel

## Wall Connector 90° Bohle square

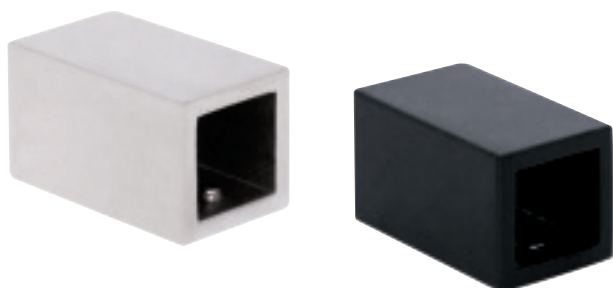

FINISH	ART. NO.
Polished	SA 5420243
Black	SA 5420243B
Size	15 x 15 mm
Material	Stainless Steel

## Glass Connector adjustable Bohle Square



FINISH	ART. NO.
Polished	SA 5420257
Black	SA 5420257B
Size	15 x 15 mm
Material	Stainless Steel

## Reinforcement Bar Bohle round ø19



FINISH · LENGTH	ART. NO.
Polished · 1000 mm	SA 5420101
Polished · 2000mm	SA 5420107
Size	ø 19 mm
Material	Stainless Steel



## Wall Connector 90° Bohle round ø19



FINISH	ART. NO.
Polished	SA 5420111
Size	ø 19 mm
Material	Stainless Steel

## Glass Connector adjustable Bohle round ø19




FINISH	ART. NO.
Polished	SA 5420121
Size	ø 19 mm
Material	Stainless Steel

## Through Connector adjustable Bohle round ø19




FINISH	ART. NO.
Polished	SA 5420125
Size	ø 19 mm
Material	Stainless Steel

## Three-Point Connector Bohle round ø19

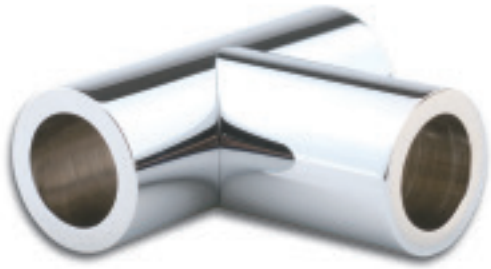

FINISH	ART. NO.
Polished	SA 5420155
Size	ø 19 mm
Material	Stainless Steel

## Corner Connector 90° Bohle round ø19

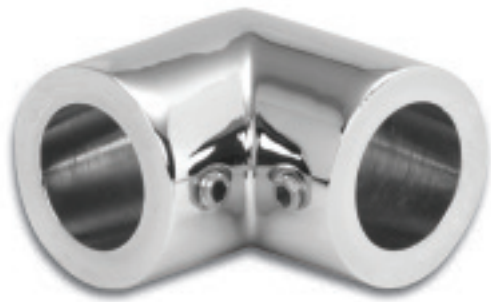

FINISH	ART. NO.
Polished	SA 5420041
Size	ø 19 mm
Material	Stainless Steel

## Connector adjustable 90°-180° Bohle round ø19



FINISH	ART. NO.
Polished	SA 5420161
Size	ø 19 mm
Material	Stainless Steel

# Shower Door Handles and Knobs

Our wide range of knobs, handles and towel holders helps individualise your shower cubicle to your personal bathroom concept. Great value is attached to the choice of different finishes and shapes available.



## Shower Doorknob Mushroom



FINISH	ART. NO.
Polished	SA 5213701
Shape	Round
Material	Aluminium
Glass processing	Yes
Width	ø 38 mm
Depth	16 mm

**i** Glass thickness tempered glass 6, 8, 10, 12 mm · Drill hole in glass  
ø 10 mm

## Shower Doorknob Rib



FINISH	ART. NO.
Polished	SA 5213725
Black	SA 5213725B
Shape	Round
Material	Aluminium
Glass processing	Yes
Width	ø 30 mm
Depth	30 mm

**i** Glass thickness tempered glass 6, 8, 10, 12 mm · Drill hole in glass  
ø 10 mm

## Shower Doorknob Groove



FINISH	ART. NO.
Polished	SA 5213722
Shape	Round
Material	Aluminium
Glass processing	Yes
Width	ø 30 mm
Depth	30 mm

① Glass thickness tempered glass 6, 8, 10, 12 mm · Drill hole in glass ø 10 mm

## Shower Door Handle/Towel rail



FINISH	ART. NO.
Polished	SA 5212508
Shape Rectangular	25x13 mm
Material	Stainless steel

① Glass thickness tempered glass 6, 8, 10, 12 mm · Drill hole in glass ø 10 mm · Distance between centre drill holes (C-C) 400/200 mm

## Shower Door Handle/Towel rail ø 19 mm



FINISH	ART. NO.
Polished	SA 5212509
Shape	Round
Material	Stainless steel

① Glass thickness tempered glass 6, 8, 10, 12 mm · Drill hole in glass ø 10 mm · Distance between centre drill holes (C-C) 400/200 mm

# Shower Door Handle Ø 19 mm with knob



FINISH	ART. NO.
Polished	SA 5215024
Shape	Round
Material	Stainless steel

❗ Can be used as either a single-sided shower door handle or a towel rail.  
· Glass thickness tempered glass 6, 8, 10, 12 mm · Distance between centre drill holes (C-C) 400 mm · Drill hole in glass ø10 mm

# Shower Door Handle with knob



FINISH	ART. NO.
Polished	SA 5215025
Shape Rectangular	25x13 mm
Material	Stainless steel

❗ Glass thickness tempered glass 6, 8, 10, 12 mm · Distance between centre drill holes (C-C) 450 mm · Drill hole in glass ø10 mm



## Shower Door Handle both sides ø 25 mm



FINISH	ART. NO.
Polished	SA 5212505
Shape	Round
Material	Stainless steel

❗ Glass thickness tempered glass 6, 8, 10, 12 mm · Distance between centre drill holes (C-C) 200 mm · Drill hole in glass ø10 mm

## Shower Door Handle both sides



FINISH	ART. NO.
Polished	SA 5212520
Shape Rectangular	25x13 mm
Material	Stainless steel

❗ Glass thickness tempered glass 6, 8, 10, 12 mm · Distance between centre drill holes (C-C) 200 mm · Drill hole in glass ø 8 mm

# Flush Handle Round open



MATERIAL · FINISH · GLASS THICKNESS	ART. NO.
Stainless steel · brushed · 8 - 12 mm	SA 5214216N
Width (ø)	65 mm
Depth (H)	7 mm
Material	Stainless steel
Finish	Brushed
Glass thickness	8 - 12 mm

1 Drill hole in glass ø 52 mm

# Flush Handle Round closed




MATERIAL · FINISH · GLASS THICKNESS	ART. NO.
Stainless steel · brushed · 8 - 12 mm	SA 5214217N
Width (ø)	65 mm
Depth (H)	7 mm
Material	Stainless steel
Finish	Brushed
Glass thickness	8 - 12 mm


1 Drill hole in glass ø 60 mm

# Shower Door Sealing Strips

This product range shows an overview of shower door sealing strips made of plastic.

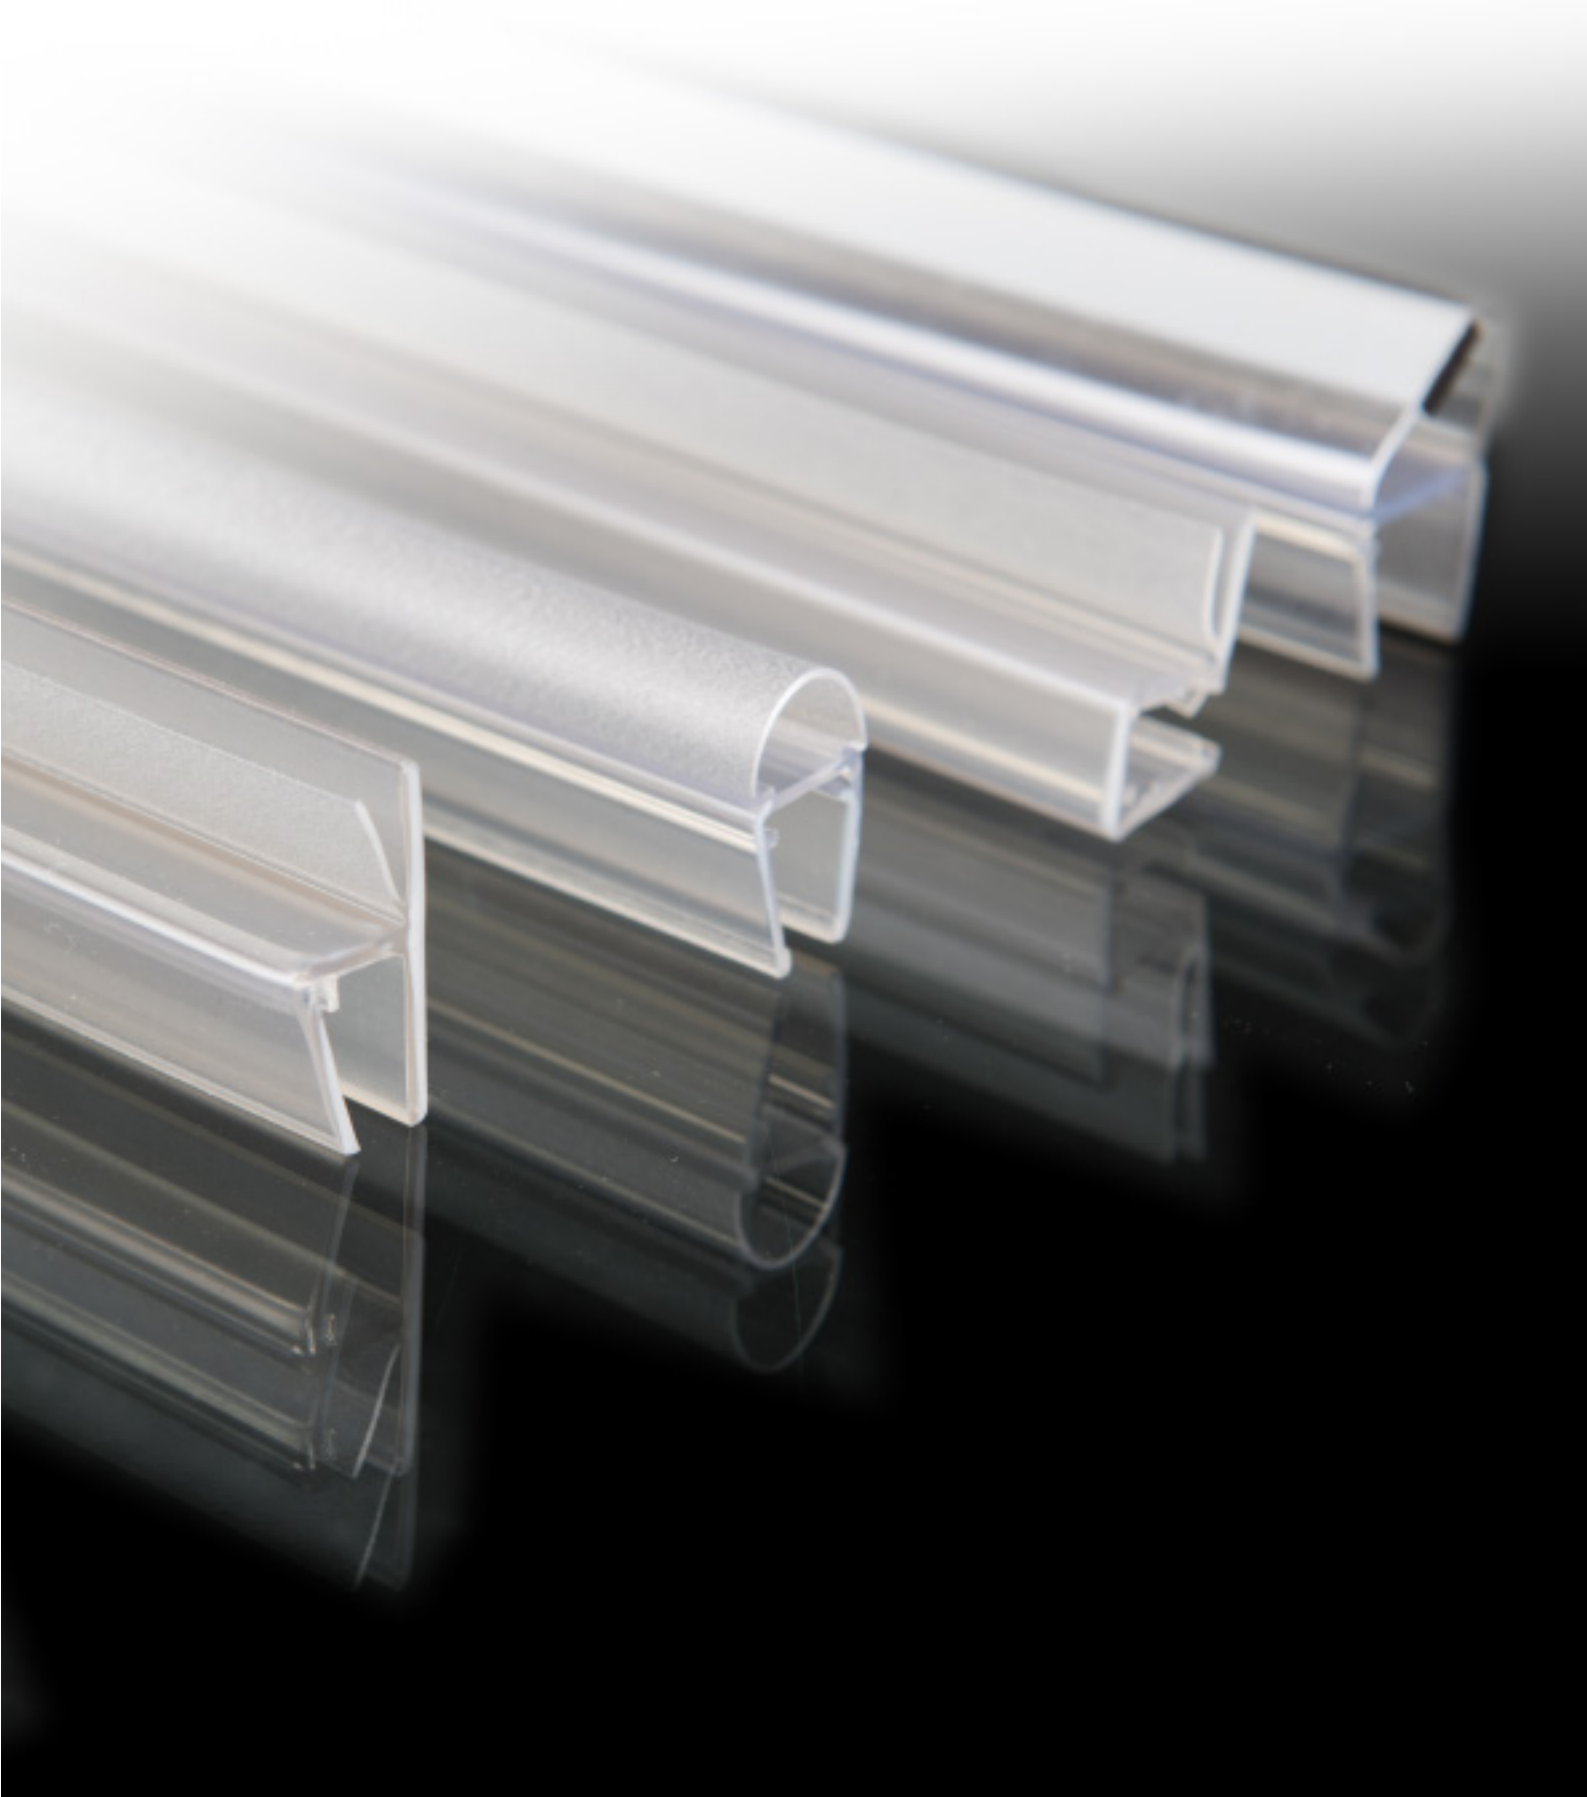


## Sealing Strip Magnet 90°/180°

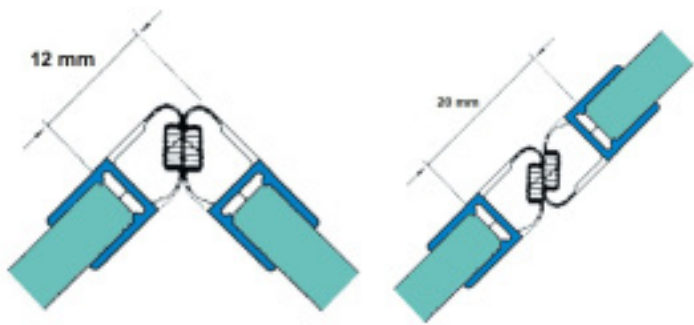

GLASS THICKNESS	COLOUR	ART. NO.
6 mm	Clear	SA 5213528
8 mm	Clear	SA 5213529
8 mm	Black	SA 5213529B
10 mm	Clear	SA 5281031

Length	3000 mm
Material	PVC
Fixing	Clip on


## Sealing Strip Magnet 135°

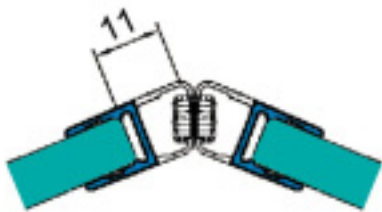

GLASS THICKNESS	ART. NO.
8 mm	SA 5213515


Length	3000 mm
Material	PVC
Fixing	Clip on

## Sealing Strip Magnet 180° inline

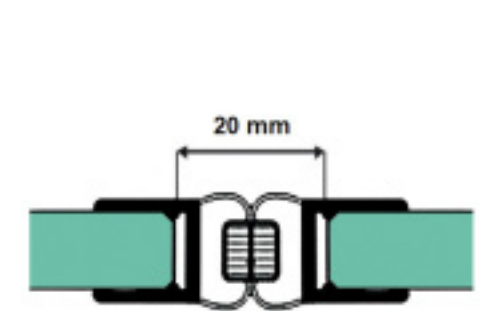


GLASS THICKNESS	ART. NO.
8 mm	SA 5213530
<hr/>	
Length	3000 mm
Material	PVC
Fixing	Clip on

## Sealing Strip Soft Lip

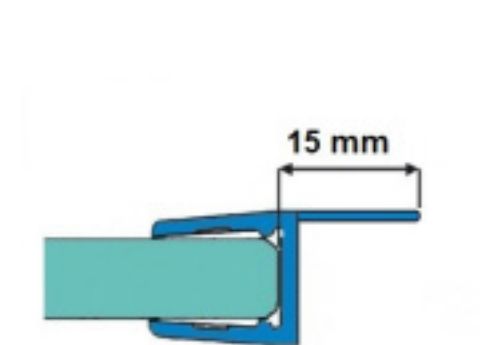


LIP · GLASS THICKNESS	COLOUR	ART. NO.
Soft · 8 mm	Clear	SA 5213493
Soft · 8 mm	Black	SA 5213493B
Hard · 8 mm	Clear	SA 5213494
Soft · 10 mm	Clear	SA 5281093
Hard · 10 mm	Clear	SA 5281092
<hr/>		
Length	3000 mm	
Material	PVC	
Fixing	Clip on	

## Sealing Strip Bubble

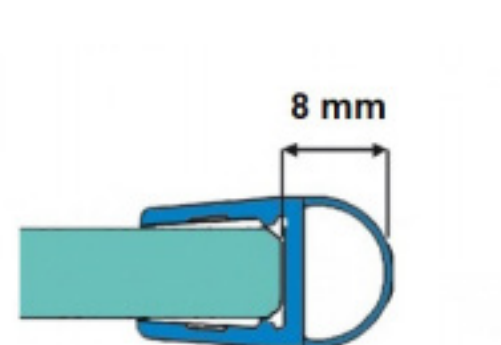

GLASS THICKNESS	ART. NO.
8 mm	SA 5213517
10 mm	SA 5281020
<hr/>	
Length	3000 mm
Material	PVC
Fixing	Clip on


## Sealing Strip Drip

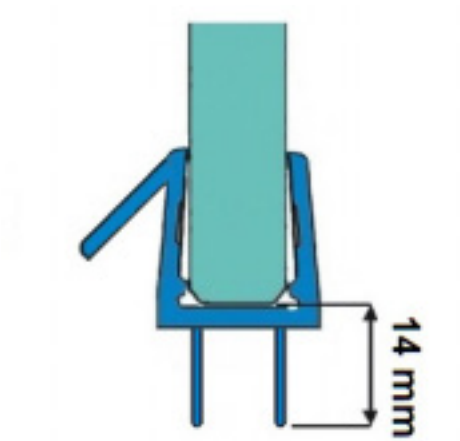

GLASS THICKNESS	ART. NO.
8 mm	SA 5213490
10 mm	SA 5281091

Length	3000 mm
Material	PVC
Fixing	Clip on

## Sealing Strip 90° Soft lip

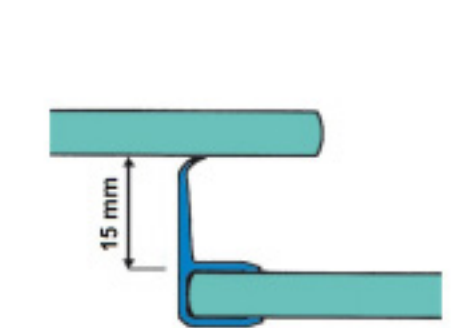

GLASS THICKNESS	ART. NO.
8 mm	SA 5213524

Length	3000 mm
Material	PVC
Fixing	Clip on

## Sealing Strip Lateral



GLASS THICKNESS	ART. NO.
8 mm	SA 5281094
10 mm	SA 5281095

Length	3000 mm
Material	PVC
Fixing	Clip on



# Accessories for Bathrooms

Bohle offers a large selection of Accessories to compliment and enhance Bathrooms. These include Mirror Fixing solutions, Duplocoll®, Glazing Profiles, Shelf Supports, Glass Cleaners and the revolutionary surface protection solution, BriteGuard® Pro



## Magnetic Set safemax® 16

safemax® 16 is suitable for the quick mounting of mirrors manufactured according to DIN EN 1036. The lipped plates are equipped with Xtramount® mirror adhesive tape on both sides. After bonding the plates to the mirror, only a short resting time of 30 minutes is required; the mirror can then be hung up again. The press buttons included in the set secure the mirror against slipping. The mirror can be detached again at all times, if needed. When splinter protection film is used, the area reserved for the lipped plates must not be covered. · Only one set must be used per mirror. In this way, the mirror is fixed on two suspension points. This achieves uniform load distribution over both mirror plates, avoiding optical distortions. Do not use multiple sets per mirror; uneven load distribution can occur when three or more plates are mounted. This may lead to the overload or even the detachment of individual plates. Mirrors must not be mounted overhead using this mounting set, e. g., over a sofa, without additional safeguards.



DESCRIPTION	ART. NO.
safemax® 16	BO 5208230
Safety catch	Magnet
Mirror surface	1,6 m <sup>2</sup>
Load capacity	24 kg

❗ Use only one set per mirror. Do not use multiple sets per mirror! · Never mount the mirror in overhead areas. · Please always observe the German Glazing Trade Technical Guidelines. · The mirror mounting sets are suitable for mirrors as per DIN EN 1036. · One set is suitable for a mirror size of max. 1.6 m<sup>2</sup>. · The weight of the mirror including all add-on parts must not exceed 24 kg · suitable for standard humid environments (not saunas!) · Storage at room temperature and approx. 60% relative humidity · For durability, see the information on the label.

### INCLUDED IN DELIVERY:

- 2x Lipped plates 200 x 100 mm with Xtramount® mirror adhesive tape
- 2x Metal plates 70 x 70 x 1 mm with Xtramount® mirror adhesive tape
- 2x Eccentric Discs
- 2x Magnets ø 45 mm
- 2x Spacers
- 4x Screws ø 4 x 50 mm
- 4x Plugs ø 6 x 36 mm

# Domehead Mirror Screws



DESCRIPTION	ART. NO.
Domeheads, 25 mm x 8 steel screws	BO 6003217
Domeheads, 30 mm x 8 steel screws	BO 6003218
Domeheads, 40 mm x 8 steel screws	BO 6003219

**i** Chrome or Stainless Steel domeheads with steel screws, boxed in 200's.

# Grommets




DESCRIPTION	ART. NO.
Grommets	SA 5200988

**i** For avoiding direct contact between wood screw and mirror when using mirror screws · sales unit = 200 items · Drill hole in glass ø 7 mm


## Mirror Adhesive Tape XtraCryl

Highly transparent, polyacrylate-based adhesive tape with adhesive on both sides. It has an excellent initial tack, offering a high degree of security shortly after application. XtraCryl shows excellent resistance to ageing, weathering, temperature and solvents and is ideal for bonding rough materials as well as for permanently bonding glass, metal, mirrors as per DIN EN 1036 and many plastics. Stresses in the adhesive bond are reduced and the strength of the bond increases greatly over time. We particularly recommend XtraCryl for mounting laminated safety glass mirrors and when bonding cast resin panes. · Technical data: Peel strength\*: steel up to 41N/25mm · glass up to 40N/25mm Shear strength\*\*: up to 30N/625 mm<sup>2</sup> at 20°C · up to 15N/625 mm<sup>2</sup> at 70°C Temperature range: -40°C to +120°C, for short periods of time up to +150°C Shelf life: 12 months (room temperature 20°C, humidity 50 %) (According to AFERA \*4001, \*\*4012, depending on thickness, technical data can vary slightly - please request our data sheet.)

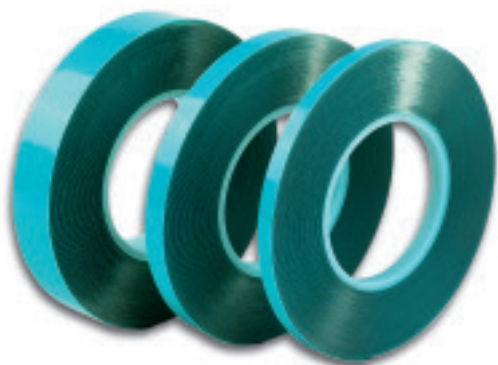

WIDTH · THICKNESS · ROLL LENGTH	ART. NO.
6 mm · 1,0 mm · 25 m	BO 5207740
25 mm · 1,0 mm · 25 m	BO 5207745

## Mirror Tape

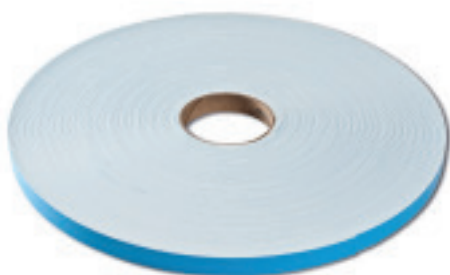

SIZE	ART. NO.
18 mm · 1,6 mm · 60 m	SA MT181660
18 mm · 3,0 mm · 30 m	SA MT183030
24 mm · 1,6 mm · 60 m	SA MT241660
24 mm · 3,0 mm · 30 m	SA MT243030

## Bohle Duplocoll® double sided adhesive tape

Duplocoll® is the ideal adhesive tape for sealing glass joints when transparency is especially important, e.g. for all-glass partition walls, in furniture construction or for shower cubicles. The bonds are almost invisible due to the fact that the light refraction index of the tape is similar to that of glass.



GLASS THICKNESS · WIDTH	ART. NO.
Tempered glass 8 mm, laminated glass 8.76 mm · 5 mm	BO 5207936
Tempered glass 10 mm, laminated glass 10.76 mm · 7 mm	BO 5207938
Tempered glass 12 mm, laminated glass 12.76 mm · 9 mm	BO 5207935

Length	12 m
Finish	Transparent

- ❗ Significant time and cost saving as compared to sealing with silicone
- By sealing the edges of the adhesive tape, Duplocoll® becomes dry after adhesion and resistant to external influences
- Antimicrobial effect - inhibits growth of microorganisms
- Resistant to chemicals and softeners
- Very good initial tack, lasting ultimate bonding strength
- Resistant to ageing and UV radiation, economic, high quality and does not affect the external appearance of the construction
- Clean and very easy application process, especially with optional applicator (BO 5207939N)
- For different materials, such as wood, aluminium, plastic, ceramic or glass
- Versatile application possibilities
- Duplocoll® not only bonds, but also seals, damps, isolates and protects.
- Optimum compensation of tolerances and tensions
- Joints are closed in a way that a sealed system is created.
- Also suitable for rough surfaces: The viscoelastic adhesive film distributes evenly across rough surfaces.
- Noise-tested adhesive tape - Duplocoll® closes the glue joint between the glass pane so tightly that sound insulation is preserved verifiably.
- Thickness 3 mm
- Max. allowable continuous temperature -40°C - +150°C
- When using Duplocoll® on laminated safety glass with acoustic PVB film, its suitability for this purpose must be tested beforehand.
- Standard laminated safety glass with PVB film does not show any interaction with Duplocoll® products!



# Bohle Duplocoll® Applicator



GLASS THICKNESS	ART. NO.
Tempered glass 8 -10 mm	BO 5207939
Tempered glass 12 mm, laminated glass 10.76 - 12.76 mm	BO 5207946

**i** Please use the corresponding applicator to ensure simple and precise application on the glass edge. · For 10 and 12 mm glass, please use the suitable inlay BO 5207948 together with the applicator BO 5207939N. · For 8, 8.76 and 10 mm glass, please use the suitable inlay BO 5207947 together with the applicator BO 5207946N. · For 17.52 mm glass, please use the suitable inlay BO 5207949 together with the applicator BO 5207946N.

## Transparent Setting Strips



THICKNESS	ART. NO.
1 mm	BO 5121001
2 mm	BO 5121002
3 mm	BO 5121003
4 mm	BO 5121004
5 mm	BO 5121005
6 mm	BO 5121006
Material	Plastic
Length	50 mm
Width	6 mm

**i** Transparent setting strips made of plastic · for use when mounting all-glass showers, all-glass assemblies, mirrors or other glazing applications · Packaging unit 100 items




# Glazing Profiles and Thresholds

## U-Channels 15.7 x 15.7 x 1.6



LENGTH · FINISH · SIZE	ART. NO.
3000 mm · bright polished · 15.7 x 15.7 x 1.6 mm	SA 5201540
Material	Aluminium




**i** Glass thickness 10 mm, Material Aluminium, Intended purpose: Installation of fixed partition walls, corner protectors, decorative cladding and a diverse range of other applications, Corrosion-resistant and therefore suitable for use in bathrooms and kitchens

## U-Channels 12.5 x 12.5 x 2.0



LENGTH · FINISH · SIZE	ART. NO.
3000 mm · bright polished · 12.5 x 12.5 x 2.0 mm	SA 5201541
Material	Aluminium



**i** Glass thickness 8 mm, Material Aluminium, Intended purpose: Installation of fixed partition walls, corner protectors, decorative cladding and a diverse range of other applications, Corrosion-resistant and therefore suitable for use in bathrooms and kitchens

## Threshold



LENGTH	ART. NO.
1000 mm	SA 5201542
3000 mm	SA 5201543
Material	Aluminium
Finish	Bright Polished

❶ Non self-adhesive · Threshold must be fixed individually and on site.


## Shelf Supports

### Glass Shelf Support cylindrical Ø 20 x 21 mm



	ART. NO.
	SA 5200047
Material	Zinc
Finish	Chrome-plated
Fixing type	Screw-fixed
Shape	Round/cylindrical
Mounting	Glass/glass
Glass processing	Yes

❶ With clamping screw and plastic washers · Ø 6 mm hole in glass · Glass thickness 6 - 8 mm

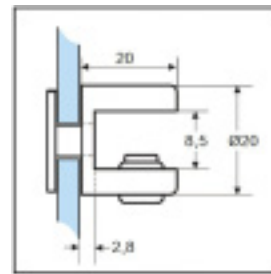


Glass Shelf Support cylindrical ø 20 x 21 mm




❗ Glass thickness 6 - 8 mm · max. projection 150 mm · Width max. 600 mm · Load capacity 5kg /pair

	ART. NO.
	SA 5207105
Material	Zinc
Finish	Chrome-plated
Fixing type	Screw-fixed
Shape	Round/cylindrical
Mounting	Glass/wall
Glass processing	No

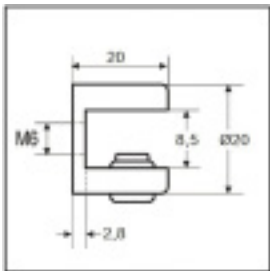

Glass Shelf Support D-shaped ø 50 mm

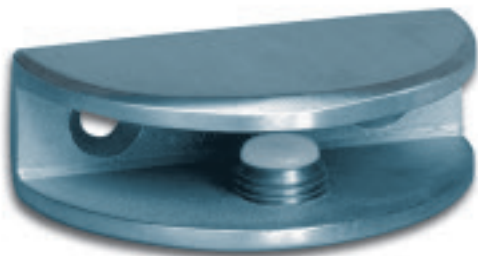

❗ Glass thickness 6 - 10 mm · max. projection 160 mm · Width max. 600 mm · Load capacity 5kg /pair

DESCRIPTION	ART. NO.
ø 51 mm for 10 mm glass	SA 5207201
ø 48 mm for 8 mm glass	SA 5207202
ø 33 mm for 6 mm glass	SA 5107203
Fixing type	Screw-fixed
Shape	Semicircular
Mounting	Glass/wall
Glass processing	No

# Cleaning and Surface Protection

## Bohle Premium Glass Cleaner

Ideal for windows, mirrors, windscreens and other glass surfaces · prevents fresh smudging · no streaking · in spray bottles without propellants · biologically degradable · with the purchase of one carton (=12 bottles), 3 spray heads are included



DESCRIPTION	ART. NO.
Contents 1 l	BO 5107805

## Bohle Professional Glass Cleaner



DESCRIPTION	ART. NO.
Spray can of 660 ml	BO 5107900

**i** Can be used for glass, smooth plastic surfaces, mirrors, car windows, tiles · for workshop and home, showcases and display windows · sparkling surfaces without streaking · environmentally sound propellant · Ideal for cleaning glass parts after fusing

## BriteGuard® Pro 100 ml for smooth glass surfaces

BriteGuard® Pro is a transparent coating for all smooth glass and glazed ceramic surfaces which offers quick and reliable protection against corrosion. In addition, an easy-to-clean surface is created which makes it hard for dirt particles to adhere to it!

Pre-clean, apply, wipe dry, done! The coating is suited both for interior and exterior applications and lasts for many years. The coating makes the glass surface hydrophobic and therefore easy to clean. Contamination barely sticks to the surface and water rolls off – for this reason, aggressive chemical agents become unnecessary for cleaning. The coating of the glass is done manually. No large investments in auxiliary application devices required. Any silicone-free glass cleaner or suitable alcohol based cleaners can be used for pre-cleaning.

BriteGuard® Pro is a smart enhancement of BriteGuard® Surface Sealer and BriteGuard® Express. It has the durability and resistance of the Sealer and is as quick in use as BriteGuard® Express. A true all-rounder.



DESCRIPTION	ART. NO.
100 ml	BO 5850101
500 ml	BO 5850500

- Durable protection for glass showers, windows, conservatories etc.
- easy handling without high investment costs
- Suitable for interior and exterior applications
- Shelf life in original packaging: 12 months from the date of manufacture

## XtraClean Cleaning Paste

XtraClean removes the most diverse types of contamination quickly and easily. It removes limescale from glass showers, cleans glass processing machines, and removes grinding residues, especially from satin-finished glass. XtraClean can simply be applied using a damp microfibre cloth. Higher temperatures will release more essential oils. This makes the use of the cleaning paste even more economic. XtraClean should be found in every workshop and is a useful companion on building sites. It can even be very helpful in your kitchen at home.



DESCRIPTION	ART. NO.
Can with 100 g	BO 5886001

- Consumption approx. 5 kg/100 m<sup>2</sup>
- Suitable for uncoated glass, different metals and scratch-resistant surfaces
- Not suitable for car paints!
- No irritant or corrosive ingredients
- Shelf life: 3 years

### NOTE:

Images, technical drawings and specifications in this catalogue are for reference only and might differ from the product supplied.



Bohle Glass Equipment (Pty) Ltd

Unit 3, Graphite Industrial Park  
Fabriek Street, Strijdom Park 2125  
Gauteng

T +27 11 792-6430 · F +27 11 793-5634

info@bohle.co.za · www.bohle.com

 Bohle