






MASTERTRACK® BT SET FOR WOODEN DOOR

Product highlights

- Concealed floor guide
- Simple screwing of the adapter
- Installation with and without fixed glazing
- Height adjustment +/- 3 mm
- Smooth closing mechanism
- Optional metal damper with high-quality hydraulics and double-sided spring guide

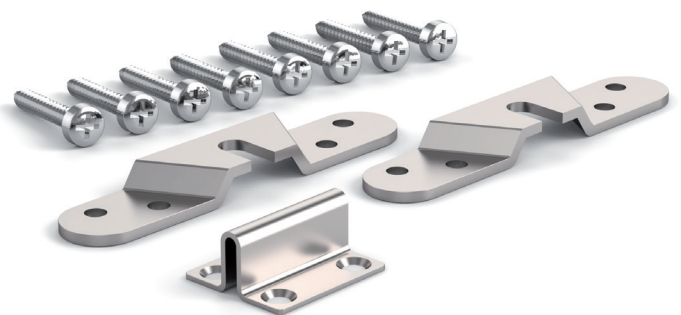

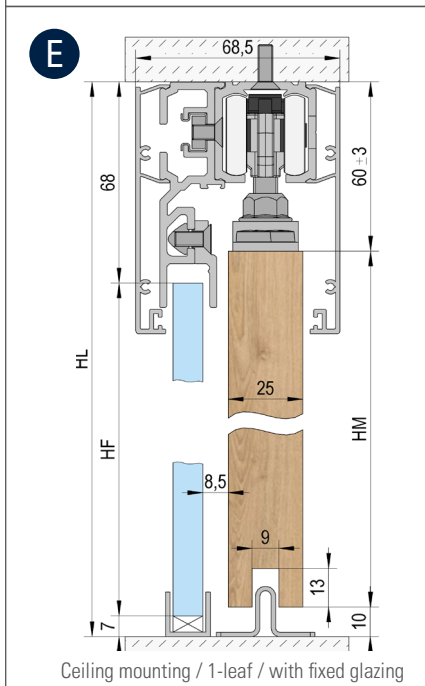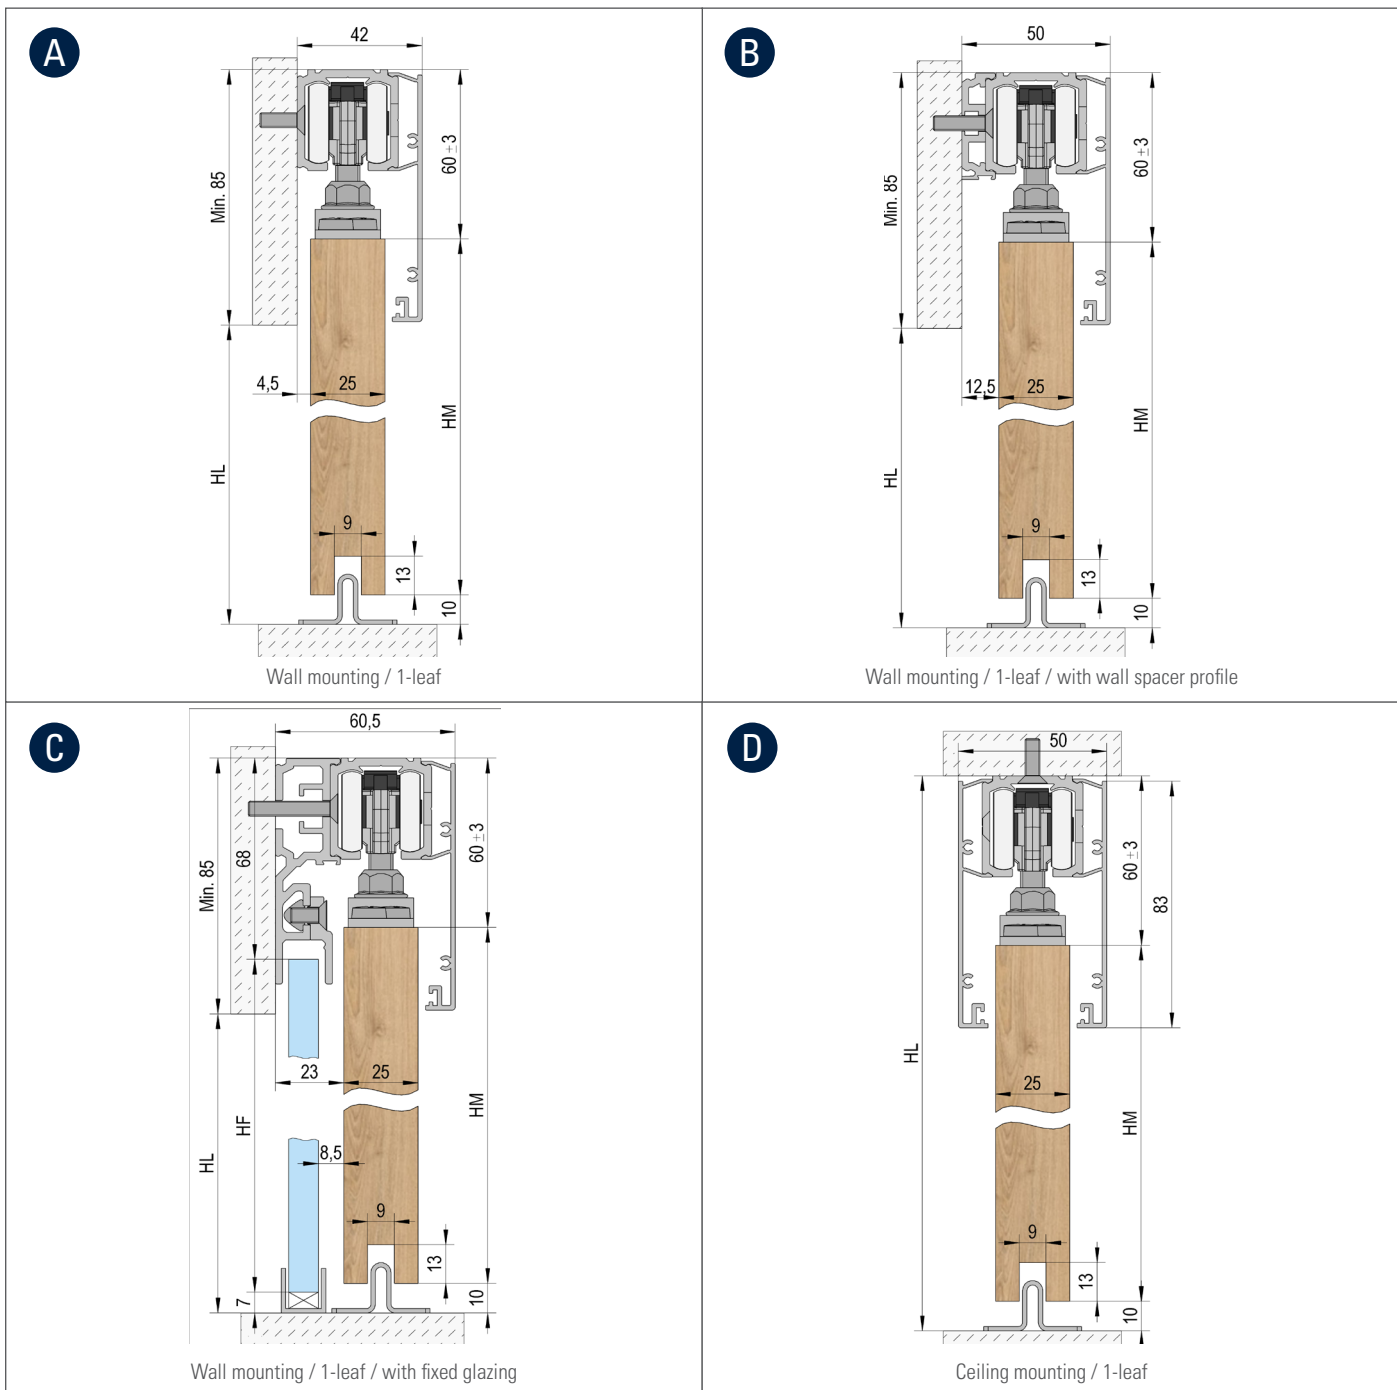

A B C Door height (HM) = HL + 15 mm / Glass fixed part (HF) = HL + 10 mm

D E Door height (HM) = HL - 70 mm / Glass fixed part (HF) = HL - 75 mm

PRODUCT	ART. NO.	A	B	C	D	E
Running Track 2/3/4/6m	BO 5802011/5803011/5804011/5806011	1x	1x	1x	1x	1x
Supplementary profile for fixed sidelights 2m	BO 5802031			*		*
Wall distance profile 2m	BO 5802061		*			
Accessory set wood solution	BO 5800013	1x	1x	1x	1x	1x
Carriages	BO 5800002	1x	1x	1x	1x	1x
Carriages incl. damping mechanism**	BO 5800060/5800080/5800120	2x*	2x*	2x*	2x*	2x*
Cover 83 mm height 2/3/4/6m	BO 5802021/5803021/5804021/5806021	1x	1x	1x	2x	2x
U-Channels 2.5/5m	BO 6703434/6703446			1x		1x

* Quantity depends on the length of the runner.

** Alternative to roller unit BO 5800002 - The roller units are integrated in the retractable dampers. To install damping on both sides, two carriages are replaced by two retractable dampers.