




# MASTERTRACK® BT FLUSH MOUNTING

## Product highlights

- Installation with and without fixed glazing
- Simple glass clamping mechanism for secure hold
- Height adjustment +/- 3 mm
- Smooth closing mechanism
- Safe anti-jump protection
- Revision of components possible at any time
- Floating floor guide with two-lane solution
- 2-leaf version incl. driver function
- Optional metal damper with high-quality hydraulics and double-sided spring guide



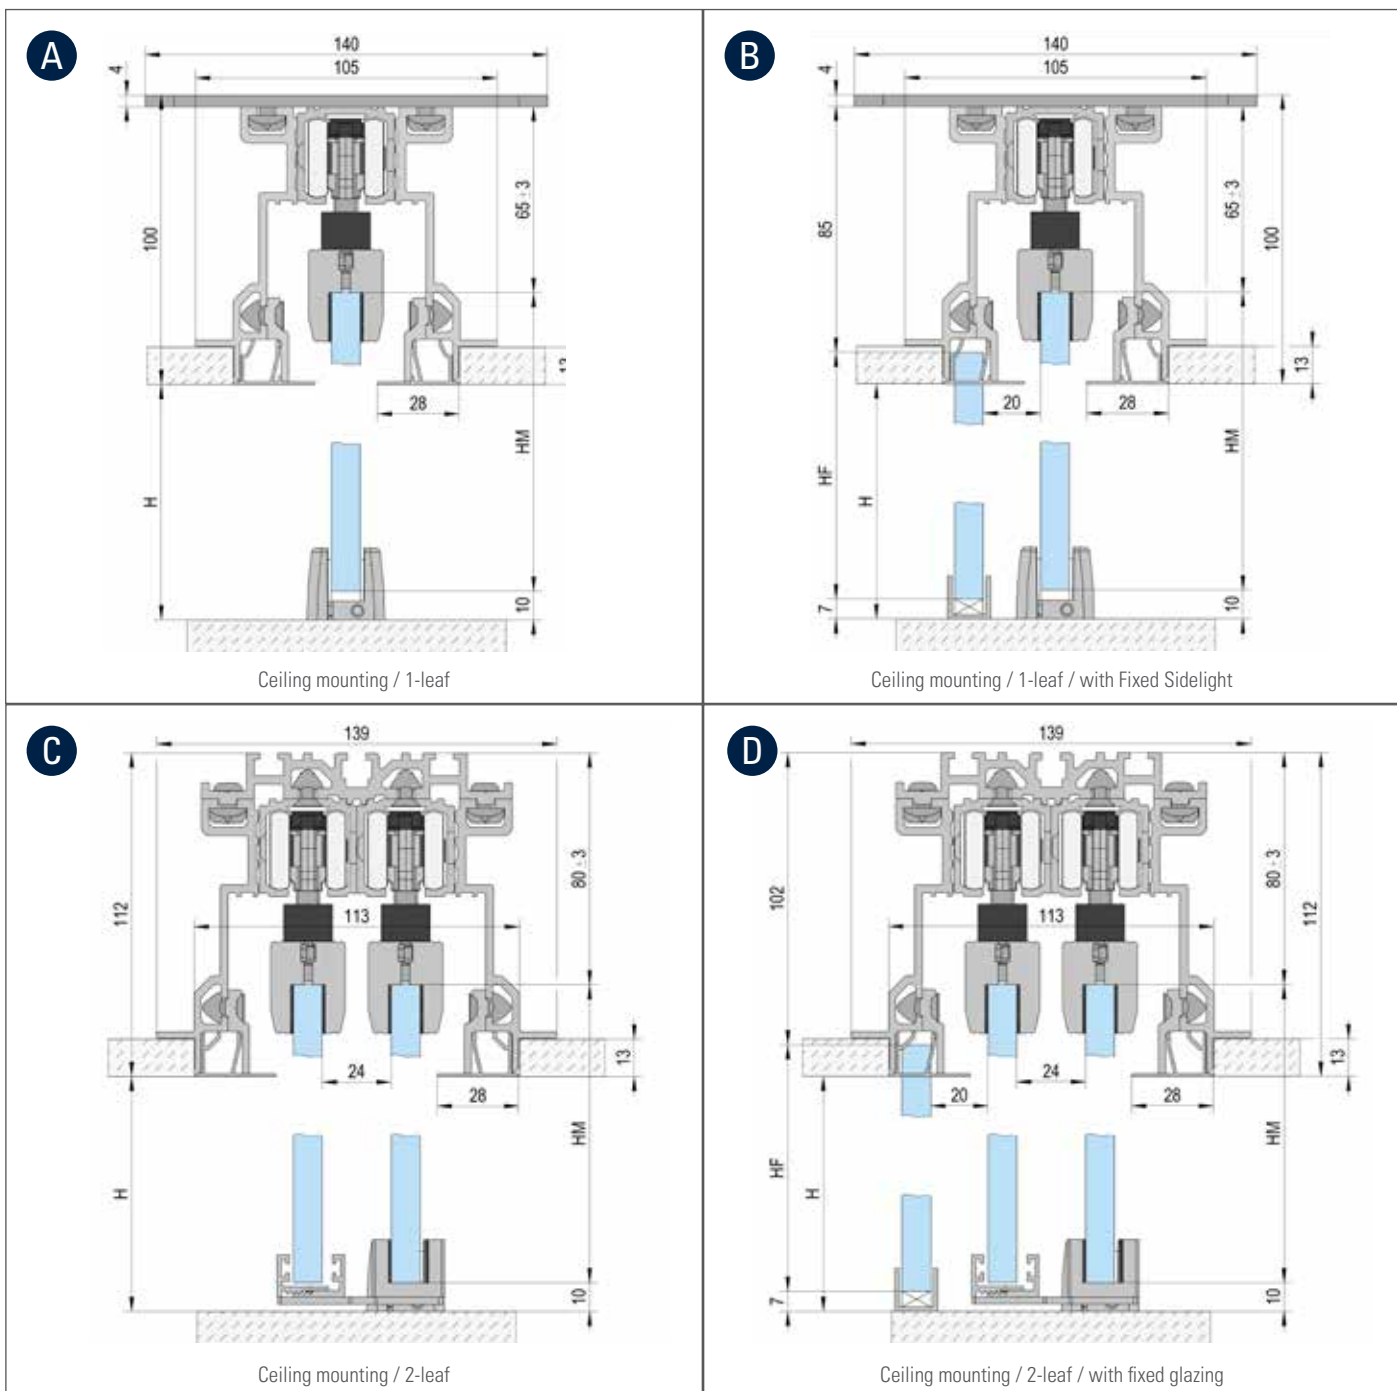

Glass height (HM) = H + 11 mm

Glass fixed part (HF) = H + 4 mm

PRODUCT	ART. NO.	A	B	C	D
Running Track 2/3/4/6m	BO 5802011/5803011/5804011/5806011	1x	1x	2x	2x
Profile Set for installation flush with the ceiling 1-flg. 3/6m	BO 5803051/5806051	1x	1x		
Profile Set for installation flush with the ceiling 2-flg. 3/6m	BO 5803061/5806061			1x	1x
Carriages	BO 5800002	1x	1x	2x	2x
Carriages incl. damping mechanism*	BO 5800060/5800080/5800120	2x*	2x*	4x*	4x*
Profile Set for flush installation with the ceiling for one door	BO 5800011	1x	1x		
Profile Set for flush installation with the ceiling for two doors	BO 5800012			1x	1x
U-Channels 2.5/5m	BO 6703434/6703446		1x	1x	

\* Alternative to BO 5800002 bogie - The bogies are integrated in the retractable dampers. To install damping on both sides, two carriages are replaced by two retractable dampers.