

MasterTrack® ST

Maximum Shower Comfort thanks to a new Sliding Door System



Maximum Shower Comfort thanks to a new Sliding Door System

MasterTrack® ST for showers is a high-tech sliding door system which stands out not only due to its minimalistic design and sophisticated technology but also convinces with its very easy installation:

Thanks to a clamping mechanism, drill holes in the glass pane are no longer required, which makes the installation process even simpler. Special clamping inserts guarantee a safe and stable support of the glass. The technologically advanced carriages and patented all-metal dampers with high-quality hydraulics enable a unique running smoothness of the system. They form a balanced unit moving the sliding door softly and smoothly.

The MasterTrack® ST shower door system is well suited for recess and corner applications, as well as for detached showers, and has a carrying capacity of up to 40 kg. The system is suitable both for small bathrooms in need of a space-saving shower installation and for spacious shower applications (up to 2 m). The system is equipped with a variable bottom guide and can either be mounted with a threshold or as a barrier-free installation. The bottom guide connection element can even be detached to allow for a barrier-free installation – thus conveying a classy look. The small gap (12 mm) between the fixed sidelight and the sliding door minimises water leakage while taking a shower.


Patented all-metal dampers with high-quality hydraulics



Safe and stable support of the glass thanks to special clamping inserts



Optional threshold

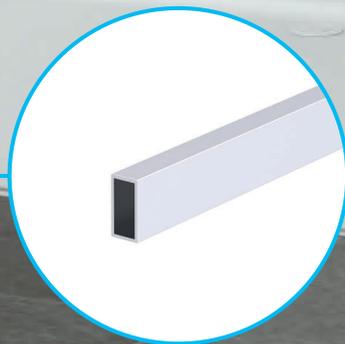

Benefits at a Glance

- Impressive running smoothness with a high-quality damping system
- No glass processing, e.g. drill holes, required
- Ideal force absorption and safe unhinging mechanism
- Quick installation, system can be adjusted from the front
- Height adjustable by +/- 3 mm

Installation Options



Two-sided corner application



Recess application



U-shower



One-sided corner application





Bohle MasterTrack® ST Recess Application Single Door

- Max. door weight 40 kg
- Glass thickness 8 mm
- No glass processing required
- Minimum door width for one-sided damping: 400 mm
- Minimum door width for double-sided damping: 600 mm


Scope of delivery

1x Running Track, 1x Cover, 1x Snapframe standard for fixed sidelight profile, 2x Carriages, 2x Stopper, 2x Wall Bracket, 1x Bottom Guide, 1x Clamp-on seal for fixed sidelight



❗ Please order optional damping mechanism separately: BO 5700051 · Please order optional threshold separately: BO 5700052 / BO 5700053 · for fixing the running track to a fixed sidelight (one-sided corner application/U-shower) please order the glass mounting kit separately: BO 5700045 / BO 5700046 · Important: Sealing strips for doors not included in delivery

LENGTH · FINISH	ART. NO.
1,200 mm · aluminium-coloured anodised E6/CO	BO 5741541
1,200 mm · polished anodised E8/CO	BO 5741543
2,000 mm · aluminium-coloured anodised E6/CO	BO 5742041
2,000 mm · polished anodised E8/CO	BO 5742043

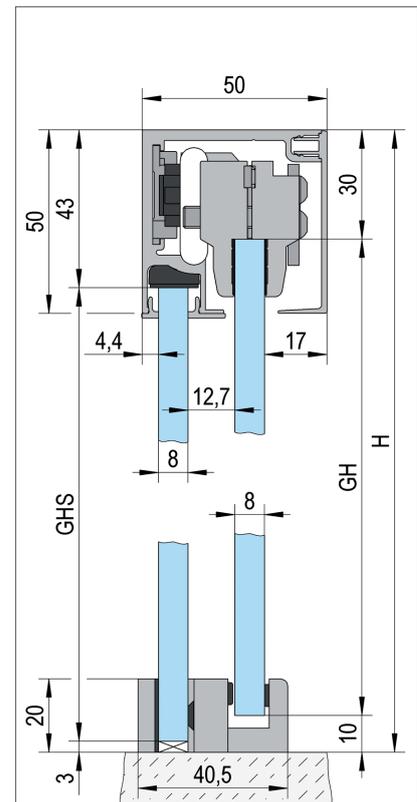

Bohle MasterTrack® ST Corner Application Double Door

- Max. door weight 40 kg
- Glass thickness 8 mm
- No glass processing required
- Minimum door width for one-sided damping: 400 mm
- Minimum door width for double-sided damping: 600 mm


Scope of delivery

2x Running Track, 2x Cover, 2x Snapframe standard for fixed sidelight profile, 4x Carriages, 4x Stopper, 2x Wall Bracket, 2x Bottom Guide, 2x Clamp-on seal for fixed sidelight, 1x Corner Connector for running track, 1x Corner connector for optional threshold



❗ Please order optional damping mechanism separately: BO 5700051 · Please order optional threshold separately: BO 5700052 / BO 5700053 · for fixing the running track to a fixed sidelight (one-sided corner application) please order the glass mounting kit separately: BO 5700045 / BO 5700046 · Important: Sealing strips for doors not included in delivery

LENGTH · FINISH	ART. NO.
1,000 x 1,000 mm · aluminium-coloured anodised E6/CO	BO 5741051
1,000 x 1,000 mm · polished anodised E8/CO	BO 5741053

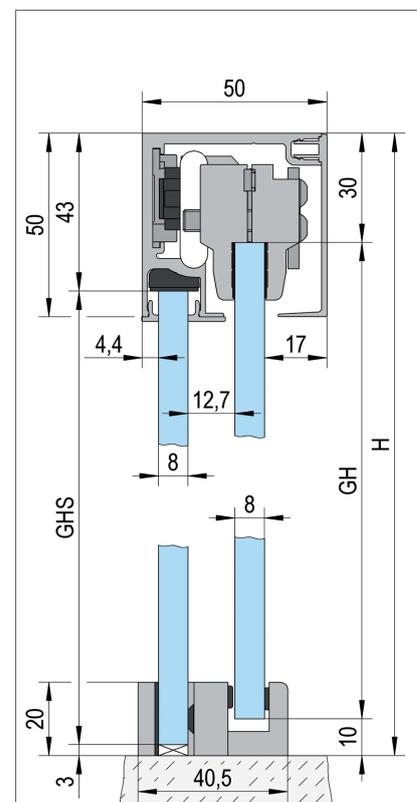

Bohle MasterTrack® ST Glass Mounting Kit

- Max. door weight 40 kg

❗ for fixing the running tracks to a fixed glazing (one-sided corner application/U-shower)



Scope of delivery

- 1x Glass Fixing Adaptor left
- 1x Glass Fixing Adaptor right
- 2x End caps for optional threshold

FINISH	ART. NO.
aluminium-coloured anodised E6/CO	BO 5700045
polished anodised E8/CO	BO 5700046

Bohle MasterTrack® ST Damping Mechanism

- Max. door weight 40 kg
- Minimum door width for one-sided damping: 400 mm
- Minimum door width for double-sided damping: 600 mm


❗ optional damper for all MasterTrack® ST sliding door installations



ART. NO.
BO 5700051

Bohle MasterTrack® ST Threshold

❗ optional threshold for all MasterTrack® ST sliding door installations ·
Size 20 x 10 mm

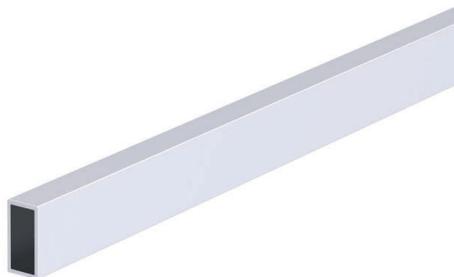

LENGTH · FINISH	ART. NO.
1,000 mm · aluminium-coloured anodised E6/CO	BO 5700052
1,000 mm · polished anodised E8/CO	BO 5700053

Bohle Ltd.
Fifth Avenue
Tameside Park
Dukinfield
Cheshire, SK16 4PP

T +44 161 3421100
F +44 161 3440111

info@bohle.ltd.uk
www.bohle.com