





MASTERTRACK® BT TELESCOPIC SOLUTION

Product highlights

- Simultaneous movement of double or triple leaf doors
- Floating floor guide
- Simple glass clamping mechanism for a secure hold
- Installation with or without fixed glazing
- Height adjustment +/-3 mm
- Smooth closing mechanism
- Safe anti-jump protection
- Optional metal damper with high-quality hydraulics and double-sided spring guide

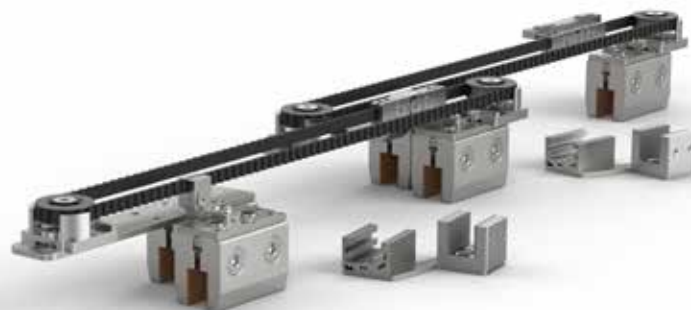


A

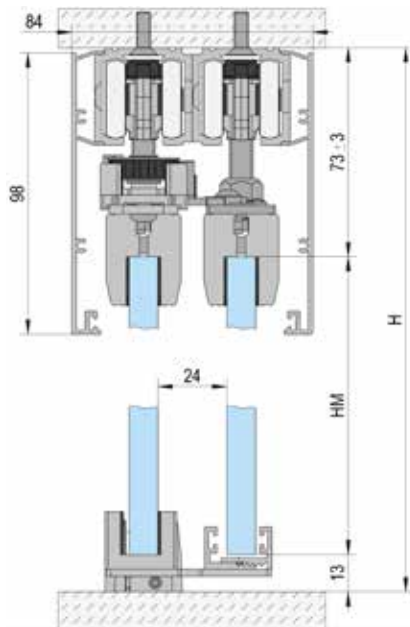


Ceiling mounting / 2-leaf

B

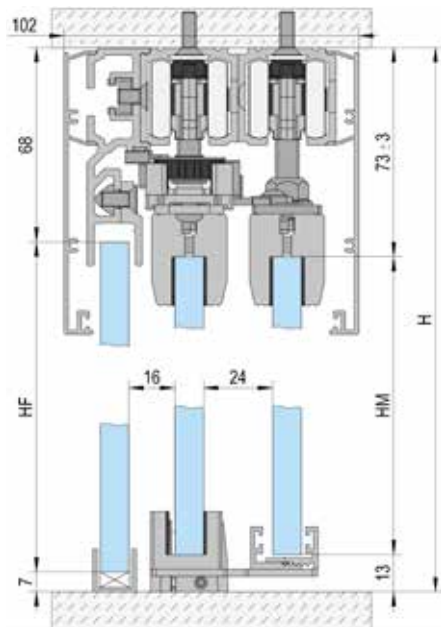


Ceiling mounting / 2-leaf / with fixed glazing

C

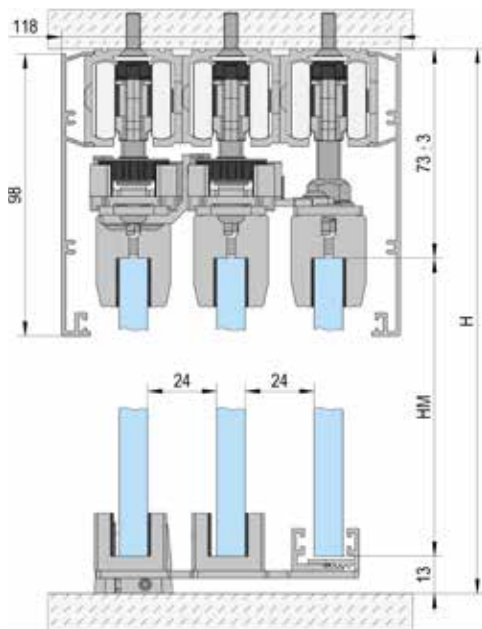


Ceiling mounting / 3-leaf

D

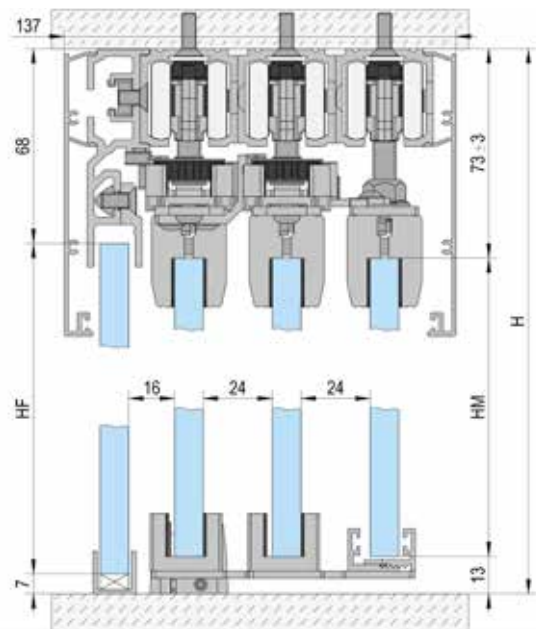

Ceiling mounting / 3-leaf / with fixed glazing

E

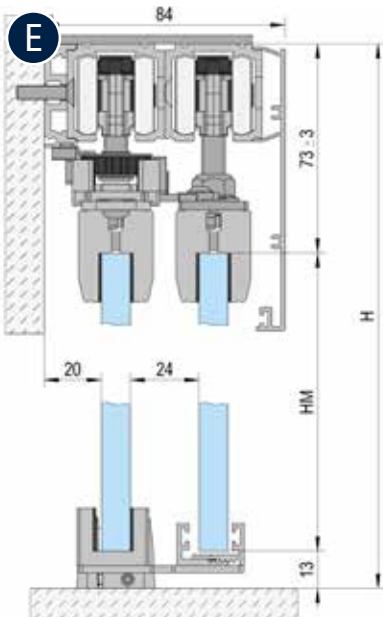

Wall mounting / 2-leaf

Glass height (HM) = H - 87 mm / Fixed sidelight (HF) = H - 75 mm

| PRODUCT | ART. NO. | A | B | C | D | E |
|---|------------------------------------|------|------|------|------|------|
| Running Track 2/3/4/6m | BO 5802011/5803011/5804011/5806011 | 2x | 2x | 3x | 3x | 2x |
| Supplementary profile for fixed sidelights 2m | BO 5802031 | | * | | * | |
| Wall distance profile | BO 5802061 | | | | | * |
| Accessory Set Telescope 2 doors | BO 5800006 | 1x | 1x | | | 1x |
| Accessory Set Telescope 3 doors | BO 5800007 | | | 1x | 1x | |
| Carriages | BO 5800002 | 2x | 2x | 3x | 3x | 2x |
| Carriages incl. damping mechanism** | BO 5800060/5800080/5800120 | 4x** | 4x** | 6x** | 6x** | 4x** |
| Glass clamp | BO 5800001 | 4x | 4x | 6x | 6x | 4x |
| Cover 98 mm height 2/3/4/6m | BO 5802041/5803041/5804041/5806041 | 2x | 2x | 2x | 2x | 1x |
| Bottom guide | BO 5700005 | 1x | 1x | 1x | 1x | 1x |
| Adaptor for wall mounting | BO 5800010 | | | | | * |
| U-Channels 2.5/5m | BO 6703434/6703446 | | 1x | | 1x | |

* Quantity depends on the length of the runner.

** Alternative to roller unit BO 5800002 - The roller units are integrated in the retractable dampers. To install damping on both sides, two carriages are replaced by two retractable dampers.